



PRODUCT BROCHURE




About Us

Welcome to **Suryshree Blocks Pvt. Ltd.** A trusted name in the building materials industry, specializing in high-quality Flyash based & Sand Lime based blocks, tile adhesives, epoxy grouts, tile grouts & gypsum plaster. With a commitment to excellence & innovation, we have been at the forefront of delivering reliable and durable construction solutions that meet the evolving needs of our customers.

At **Suryshree Blocks Pvt. Ltd.** we prioritize quality & performance. Our products are crafted using advanced technology & premium raw materials to ensure superior strength, ease of use & long-lasting results. We understand the critical role our products play in construction projects, which is why we strive to maintain the highest standards in manufacturing & customer service.

Our dedicated team of professionals works tirelessly to research, develop & enhance our product offerings. We aim to provide solutions that not only meet but also exceed the expectations of builders, contractors & homeowners alike. Our commitment to sustainability also drives us to innovate environmentally friendly practices, ensuring our processes are as efficient & green as possible.

Whether you are looking for top-notch tile adhesives, reliable grouts, or high-performance gypsum plaster, **Suryshree Blocks Pvt. Ltd.** is your go-to partner for all your construction needs. We take pride in building a strong foundation for your projects, one block at a time.

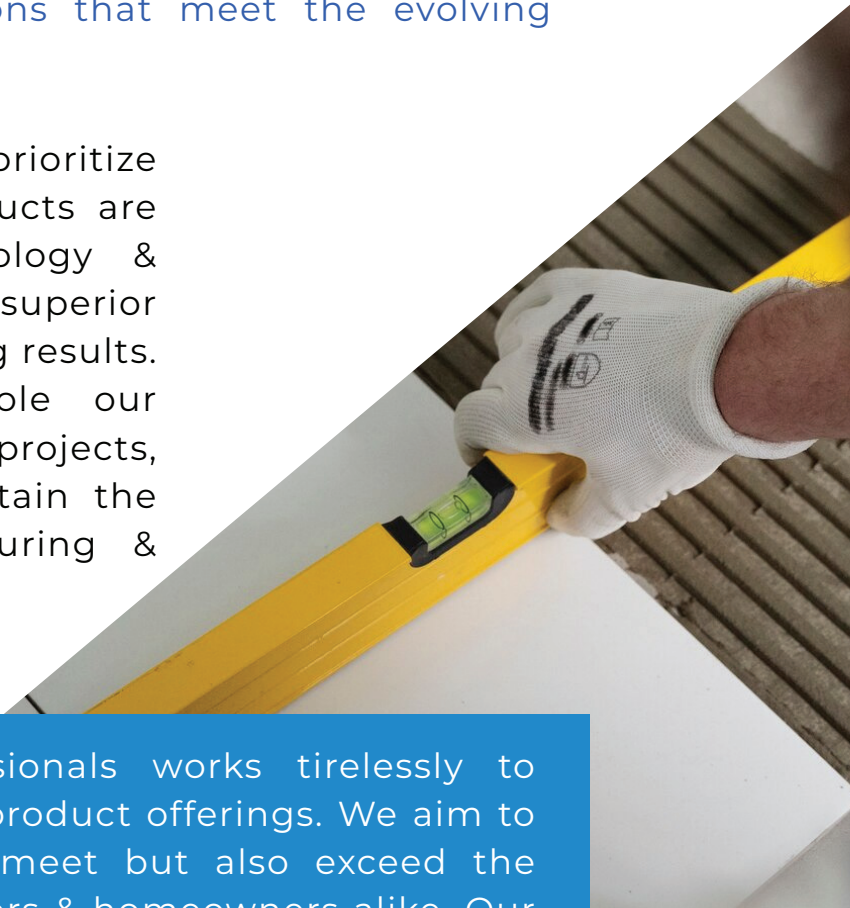

Vision & Mission

At **Suryshree Blocks Pvt. Ltd.** our vision is to become a leading and trusted brand in the building materials industry, known for our commitment to quality, innovation & sustainability. We aim to transform the construction landscape by providing advanced and reliable Tile Adhesives, Grouts & Gypsum Plaster that empower builders & contractors to create durable, efficient & aesthetically pleasing structures. We envision a future where our products set new benchmarks for excellence, ensuring safety and long-term satisfaction for all our customers.

Our mission is to deliver high-quality construction solutions that enhance the efficiency & durability of building projects.

QUALITY EXCELLENCE

Ensuring our products are manufactured to the highest standards using advanced technology & premium raw materials, offering optimal performance & reliability

CUSTOMER SATISFACTION

Building long-lasting relationships with our customers by providing exceptional service, expert guidance, and products that exceed expectations

INNOVATION & GROWTH



Continuously researching and developing new products to meet the evolving demands of the industry, while also investing in eco-friendly practices to minimize our environmental footprint

SUSTAINABILITY



Promoting sustainable construction solutions & processes that contribute to the well-being of our communities & the environment

At **Suryshree Blocks Pvt. Ltd.** we are dedicated to building the foundation for a better, more sustainable future in construction.

Suryshree Copper 528

APPLICATION AREAS

Suryshree Copper 528 is a blended polymer modified cement based high performance Tile Adhesive for fixing of Ceramics Tiles, Porcelain Tiles & Vitrified Tiles on Interior Floor, It is suitable for Ceramics Tiles, Porcelain Tiles on interior Wall.



Floor Tile Adhesive

FEATURES

- Type 1 as per IS 15477-2019
- For Tiles (>3% Porosity)
- Application up to 10mm

ACHIEVED THICKNESS

Up to 10mm

APPROXIMATE CONSUMPTION

As a guide : 1.2 kg / m₂ / mm of Thickness

SHELF LIFE



Until 12 months since the date of production when stored in undamaged dry conditions and original packaging.

COVERAGE



Consumption may vary depending on the evenness on the substrate, trowel notch size, type of tiles / stone and the application technique.

COLOURS AVAILABLE



Grey

Suryshree Silver 138

APPLICATION AREAS

Suryshree Silver 138 is a blended polymer modified cement based high performance Tile Adhesive for fixing of Ceramics Tiles, Porcelain Tiles & Vitrified Tiles on Interior/Exterior Floor. It is suitable for Ceramics Tiles, Porcelain Tiles & Vitrified Tiles on interior Wall Size upto 300X600 mm.



Floor & Wall Tile Adhesive

FEATURES

- C1 T Compliant with EN 12004 Standard
- Type 1 as per IS 15477-2019
- Application upto 10mm
- For Larger Vitrified Tiles up to 300X600 mm

ACHIEVED THICKNESS

Up to 10mm

APPROXIMATE CONSUMPTION

As a guide : 1.2 kg / m₂ / mm of Thickness

SHELF LIFE



Until 12 months since the date of production when stored in undamaged dry conditions and original packaging.

COVERAGE



Consumption may vary depending on the evenness on the substrate, trowel notch size, type of tiles / stone and the application technique.

COLOURS AVAILABLE



Grey

Suryshree Gold 808

APPLICATION AREAS

Suryshree Gold 808 is a blended polymer modified cement based high performance Tile Adhesive for fixing of Ceramics Tiles, Porcelain Tiles & Vitrified Tiles on Interior/Exterior Floor, It is suitable for Ceramics Tiles, Porcelain Tiles & Vitrified Tiles on interior Wall Size upto max 600x600 mm.



Extensive Performing Wall & Floor Tile Adhesive

FEATURES

- C2 T Compliant with EN 12004 Standard
- Type 2 as per IS 15477-2019
- For Larger Vitrified Tiles upto 600x600 mm
- Easily Trowelable

ACHIEVED THICKNESS

Up to 10mm

APPROXIMATE CONSUMPTION

As a guide : 1.2 kg / m₂ / mm of Thickness

SHELF LIFE



Until 12 months since the date of production when stored in undamaged dry conditions and original packaging.

COVERAGE



Consumption may vary depending on the evenness on the substrate, trowel notch size, type of tiles / stone and the application technique.

COLOURS AVAILABLE



Grey

Suryshree Gold Plus 148

APPLICATION AREAS

Suryshree Gold Plus 148 is a blended polymer modified cement based high performance Tile Adhesive for fixing of Ceramics Tiles, Porcelain Tiles & Vitrified Tiles on Interior/Exterior Floor, It is suitable for Ceramics Tiles, Porcelain Tiles & Vitrified Tiles on interior Wall Size upto max 600x600 mm.



Extensive Performing Wall & Floor Tile Adhesive

FEATURES

- C2 T Compliant with EN 12004 Standard
- Type 2 as per IS 15477-2019
- For Larger Vitrified Tiles upto 600x600 mm
- Easily Trowelable

ACHIEVED THICKNESS

Up to 10mm

APPROXIMATE CONSUMPTION

As a guide : 1.2 kg / m₂ / mm of Thickness

SHELF LIFE



Until 12 months since the date of production when stored in undamaged dry conditions and original packaging.

COVERAGE



Consumption may vary depending on the evenness on the substrate, trowel notch size, type of tiles / stone and the application technique.

COLOURS AVAILABLE



White

Suryshree Platinum 741

APPLICATION AREAS

Suryshree Platinum 741 is a blended polymer modified cement based high performance Tile Adhesive for fixing of Ceramics Tiles, Porcelain Tiles & Vitrified Tiles on Interior/Exterior Floor, It is suitable for Ceramics Tiles, Porcelain Tiles & Vitrified Tiles on interior and exterior For ceramic, vitrified (semi and fully) tiles, glass mosaic and natural stone (non-sensitive).



Special Formulated Stone & Tile Adhesive

FEATURES

- Type 3 as per IS 15477-2019
- C2 TE Compliant with EN 12004 Standard
- For Inside & Outside Use
- Application Upto 10mm
- For Ceramic, Vitrified (Semi & Fully) Tiles
- On Water Proof & Moisture Proof Layers
- Easy & Excellent Workability
- For Large & Small Tiles
- For Glass Mosaic & Natural Stone (Non-Sensitive)

ACHIEVED THICKNESS

Up to 10mm

APPROXIMATE CONSUMPTION


As a guide : 1.2 kg / m² / mm of Thickness

SHELF LIFE



Until 12 months since the date of production when stored in undamaged dry conditions and original packaging.

COVERAGE



Consumption may vary depending on the evenness on the substrate, trowel notch size, type of tiles / stone and the application technique.

COLOURS AVAILABLE



Grey

Suryshree

Platinum Plus 520

APPLICATION AREAS

Suryshree Platinum Plus 520 is a blended polymer modified cement based high performance Tile Adhesive for fixing of Ceramics Tiles, Porcelain Tiles & Vitrified Tiles on Interior/Exterior Floor, It is suitable for Ceramics Tiles, Porcelain Tiles & Vitrified Tiles on interior and exterior For ceramic, vitrified (semi and fully) tiles, glass mosaic and natural stone (non-sensitive).



**Special Formulated
Stone & Tile Adhesive**

FEATURES

- Type 3 as per IS 15477-2019
- C2 TE Compliant with EN 12004 Standard
- For Inside & Outside Use
- Application Upto 10mm
- For Ceramic, Vitrified (Semi & Fully) Tiles
- On Water Proof & Moisture Proof Layers
- Easy & Excellent Workability
- For Large & Small Tiles
- Glass Mosaic & Natural Stone (Non-Sensitive)

ACHIEVED THICKNESS

Up to 10mm

APPROXIMATE CONSUMPTION


As a guide : 1.2 kg / m² / mm of Thickness

SHELF LIFE



Until 12 months since the date of production when stored in undamaged dry conditions and original packaging.

COVERAGE



Consumption may vary depending on the evenness on the substrate, trowel notch size, type of tiles / stone and the application technique.

COLOURS AVAILABLE



White

Suryshree

Diamond S1 578

APPLICATION AREAS

Suryshree Diamond S1 578 is a blended polymer modified cement based high performance Tile Adhesive for fixing of Ceramic Tiles, Porcelain Tiles, Vitrified Tiles and Natural Stone on Floor and Wall. It is suitable for Internal/External Floor and Wall application.



Polymer Enhanced Stone & Tile Adhesive

FEATURES

- Type 4 S1 as per IS 15477-2019
- C2 TE S1 Compliant with EN 12004 Standard
- Visible Fibres for Strength & Flexibility Balancing Substrate Deformations on Critical Surfaces like Balconies, Terraces, Wet Rooms, Bathrooms, Swimming Pool & External Facade etc
- Glass Mosaic & Natural Stone (Non-Sensitive)
- Suitable for Large Scale & Heavy Duty Vitrified Tiles
- Suitable for Natural Stones on Internal as well as External Application
- Application Up to 15mm
- Suitable for Cement Fibre Board, Gypsum Board Installation of Floors Subjected to Heavy Traffic

ACHIEVED THICKNESS

Up to 15mm

APPROXIMATE CONSUMPTION


As a guide : 1.2 kg / m₂ / mm of Thickness

SHELF LIFE



Until 12 months since the date of production when stored in undamaged dry conditions and original packaging.

COVERAGE



Consumption may vary depending on the evenness on the substrate, trowel notch size, type of tiles / stone and the application technique.

COLOURS AVAILABLE



Grey

Suryshree

Diamond Plus S1 1818

APPLICATION AREAS

Suryshree Diamond Plus S1 1818 is a blended polymer modified cement based high performance Tile Adhesive for fixing of Ceramic Tiles, Porcelain Tiles, Vitrified Tiles and Natural Stone on Floor and Wall. It is suitable for Internal/External Floor and Wall application.



Polymer Enhanced Stone & Tile Adhesive

FEATURES

- Type 4 S1 as per IS 15477-2019
- C2 TE S1 Compliant with EN 12004 Standard
- Visible Fibres for Strength & Flexibility Balancing Substrate Deformations on Critical Surfaces like Balconies, Terraces, Wet Rooms, Bathrooms, Swimming Pool & External Facade etc
- Glass Mosaic & Natural Stone (Non-Sensitive)
- Suitable for Large Scale & Heavy Duty Vitrified Tiles
- Suitable for Natural Stones on Internal as well as External Application
- Application Up to 15mm
- Suitable for Cement Fibre Board, Gypsum Board Installation of Floors Subjected to Heavy Traffic

ACHIEVED THICKNESS

Up to 15mm

APPROXIMATE CONSUMPTION

As a guide : 1.2 kg / m² / mm of Thickness

SHELF LIFE



Until 12 months since the date of production when stored in undamaged dry conditions and original packaging.

COVERAGE



Consumption may vary depending on the evenness on the substrate, trowel notch size, type of tiles / stone and the application technique.

COLOURS AVAILABLE



White

Suryshree Diamond Ultra S2 229

APPLICATION AREAS

Suryshree Diamond Ultra S2 229 is a blended polymer modified cement based high performance Tile Adhesive for fixing of Ceramics Tiles, Porcelain Tiles & Vitrified Tiles on Interior/Exterior Floor, It is suitable for Ceramics Tiles, Porcelain Tiles & Vitrified Tiles on interior Wall Size more than 1200 x 1200 mm



**Ultra Strong
Stone & Tile Adhesive**

FEATURES

- Type 4 S2 as per IS 15477-2019
- C2 TE S2 Compliant with EN 12004 Standard
- Visible Fibres for Strength & Flexibility Balancing Substrate Deformations on Critical Surfaces like Balconies, Terraces, Wetrooms, Bathrooms Swimming Pool and External Facade etc
- Suitable for Large Scale & Heavy Duty Vitrified Tiles
- Suitable for cement Fibre Board, Gypsum Board, Installation of Floors Subjected to Heavy Traffic
- For Tile & Stones of Size More Than 1200 x 1200 mm
- Application up to 15mm

ACHIEVED THICKNESS

Up to 15mm

APPROXIMATE CONSUMPTION


As a guide : 1.2 kg / m₂ / mm of Thickness

SHELF LIFE



Until 12 months since the date of production when stored in undamaged dry conditions and original packaging.

COVERAGE



Consumption may vary depending on the evenness on the substrate, trowel notch size, type of tiles / stone and the application technique.

COLOURS AVAILABLE



Grey

Suryshree

Diamond Ultra Plus S2 427

APPLICATION AREAS

Suryshree Diamond Ultra Plus S2 427 is a blended polymer modified cement based high performance Tile Adhesive for fixing of Ceramics Tiles, Porcelain Tiles & Vitrified Tiles on Interior/Exterior Floor, It is suitable for Ceramics Tiles, Porcelain Tiles & Vitrified Tiles on interior Wall Size more than 1200 x 1200 mm



**Ultra Strong
Stone & Tile Adhesive**

FEATURES

- Type 4 S2 as per IS 15477-2019
- C2 TE S2 Compliant with EN 12004 Standard
- Visible Fibres for Strength & Flexibility Balancing Substrate Deformations on Critical Surfaces like Balconies, Terraces, Wetrooms, Bathrooms Swimming Pool and External Facade etc
- Suitable for Large Scale & Heavy Duty Vitrified Tiles
- Suitable for cement Fibre Board, Gypsum Board, Installation of Floors Subjected to Heavy Traffic
- For Tile & Stones of Size More Than 1200 x 1200 mm
- Application up to 15mm

ACHIEVED THICKNESS

Up to 15mm

APPROXIMATE CONSUMPTION


As a guide : 1.2 kg / m₂ / mm of Thickness

SHELF LIFE



Until 12 months since the date of production when stored in undamaged dry conditions and original packaging.

COVERAGE



Consumption may vary depending on the evenness on the substrate, trowel notch size, type of tiles / stone and the application technique.

COLOURS AVAILABLE



White

Suryshree Epoxy Grout

PRODUCT DESCRIPTION

Suryshree Epoxy is a two-component, epoxy-resinbased product with silica sand and special components, with excellent resistance to acids and excellent cleanability. This is a product with low emission of volatile organic compounds.



High Quality Epoxy Grout (Two-Component Chemical)

FEATURES

- Optimized UV & Weather Resistant
- Non Toxic, Anti-bacterial & Anti-Fungal
- Easy Application & Cleaning
- Excellent Chemical Resistance
- Can be Used as a Grout Mortar & Adhesive
- Stable & Uniform Colors for All Types of Tiles/Stones
- Ideal for Waterproof Grouting
- Vertical Resistance/Slip Resistance
- High Mechanical Strength
- Joint Width 1 to 12 mm
- Available in 20 Colors

APPLICATION

For interior/exterior residential, commercial, hotels & external facades.

QUANTITY

5 KG Contains Resin(A)
0.90 kg * 5 N
Hardner (B) 0.10 KG * 5 N

SHELF LIFE


15
MONTHS
Until 15 Months*

COVERAGE


Varies With Tile Size & Grout
Width

Suryshree Cement Grout

PRODUCT DESCRIPTION

Suryshree Cement Grout is made of blended portland cement, graded aggregate, fortifiers and colour fast pigments. Just mix it with water to provide a tile joint that is strong hard, durable and colourfast. It is designed for joint with 1mm to 3mm for non-absorbent & various type tiles. For better performance fortified with suryshree cement grout.



Exclusive Cement Grout

FEATURES

- Ideally Smooth Easy to Apply
- Extremely Durable Colors
- Long Working Time
- Weather Resistant
- Non Cracking, Non Shrink
- Suitable for Interior & Exterior Use
- For Tile & Stone Joints

APPLICATION

For interior/exterior residential, commercial, hotels & external facades.

SHELF LIFE



Until 12 months since the date of production when stored in undamaged dry conditions and original packaging.

COVERAGE



Varies With Tile Size & Grout Width

PACK SIZE



1 kg

Suryshree Gypsum Plaster 91688

APPLICATION AREAS/RECOMMENDED SURFACES

Suryshree Gypsum Plaster 91688 is a replacement of traditional sand cement plaster and is suitable for application on most internal surface including brick, block and concrete. Light weight aggregates like "vermiculite" and special additives are included to enhance coverage setting time and workability. It can directly replace sand cement plaster in all the internal plastering application providing smooth and levelled



FEATURES

- Coverage upto 80 m²/mt
- Total Water Absorption < 10%
- High Setting Time
- Low Thermal Conductivity

WET BULK DENSITY

- 1.4-1.5 g/cm³

BENEFITS

- Higher Moisture Resistance
- Protects Top Coats
- Protection from Mold & Fungal Growth
- Energy Saver

WATER TO POWDER RATIO

- 1:3

TECHNICAL PARAMETERS

Range/Value

SETTING TIME

15-20 Minutes

COVERAGE



Coverage at 13 mm Thickness
Under Lab Condition

PACK SIZE



25 kg Bag

Suryshree Block Adhesive

PRODUCT DISCRPTION

Suryshree Block Adhesive is a factory prepare blend of carefully selected raw material portland cement and graded aggregate and polymers. Designed for use with water to produce high strength motar, for laying aerated light weight concrete fly ash bricks AAC Blocks. it has a long open time.



ADVANTAGE

- Long Working Time
- No Curing Required After Block Work is Done
- More Economical, Fast Installation
- Single Component, Just Add Water

APPLICATION

- Suitable for AAC Blocks, Cement Blocks Flyash Brics, Concrete Blocks

SURFACE PEPRATION


- Ensure the Substrate is Clean & Free from Impurities Like Dust, Dirt, Debris, Oil, Grease, Curing Agents, Existing Paints, Loose Plaster etc.
- Dampen the Surface Before Application of Adhesive
- Clean the Back of Block for any Dust or Coating

SHELF LIFE



Until 12 months since the date of production when stored in undamaged dry conditions and original packaging.

COVERAGE



1 CBM / Bag

PACK SIZE



40 kg Bag



Contact Us

 (+91) 63599 59665

 customercare@suryshreeblocks.com

 suryshreeblocks.com

Correspondence Address

Helios House, 659/1 Gulbai Tekra, Ahmedabad - 380006, Gujarat

***BUILDING NEXT GENERATION OF
FUTURISTIC CITIES***